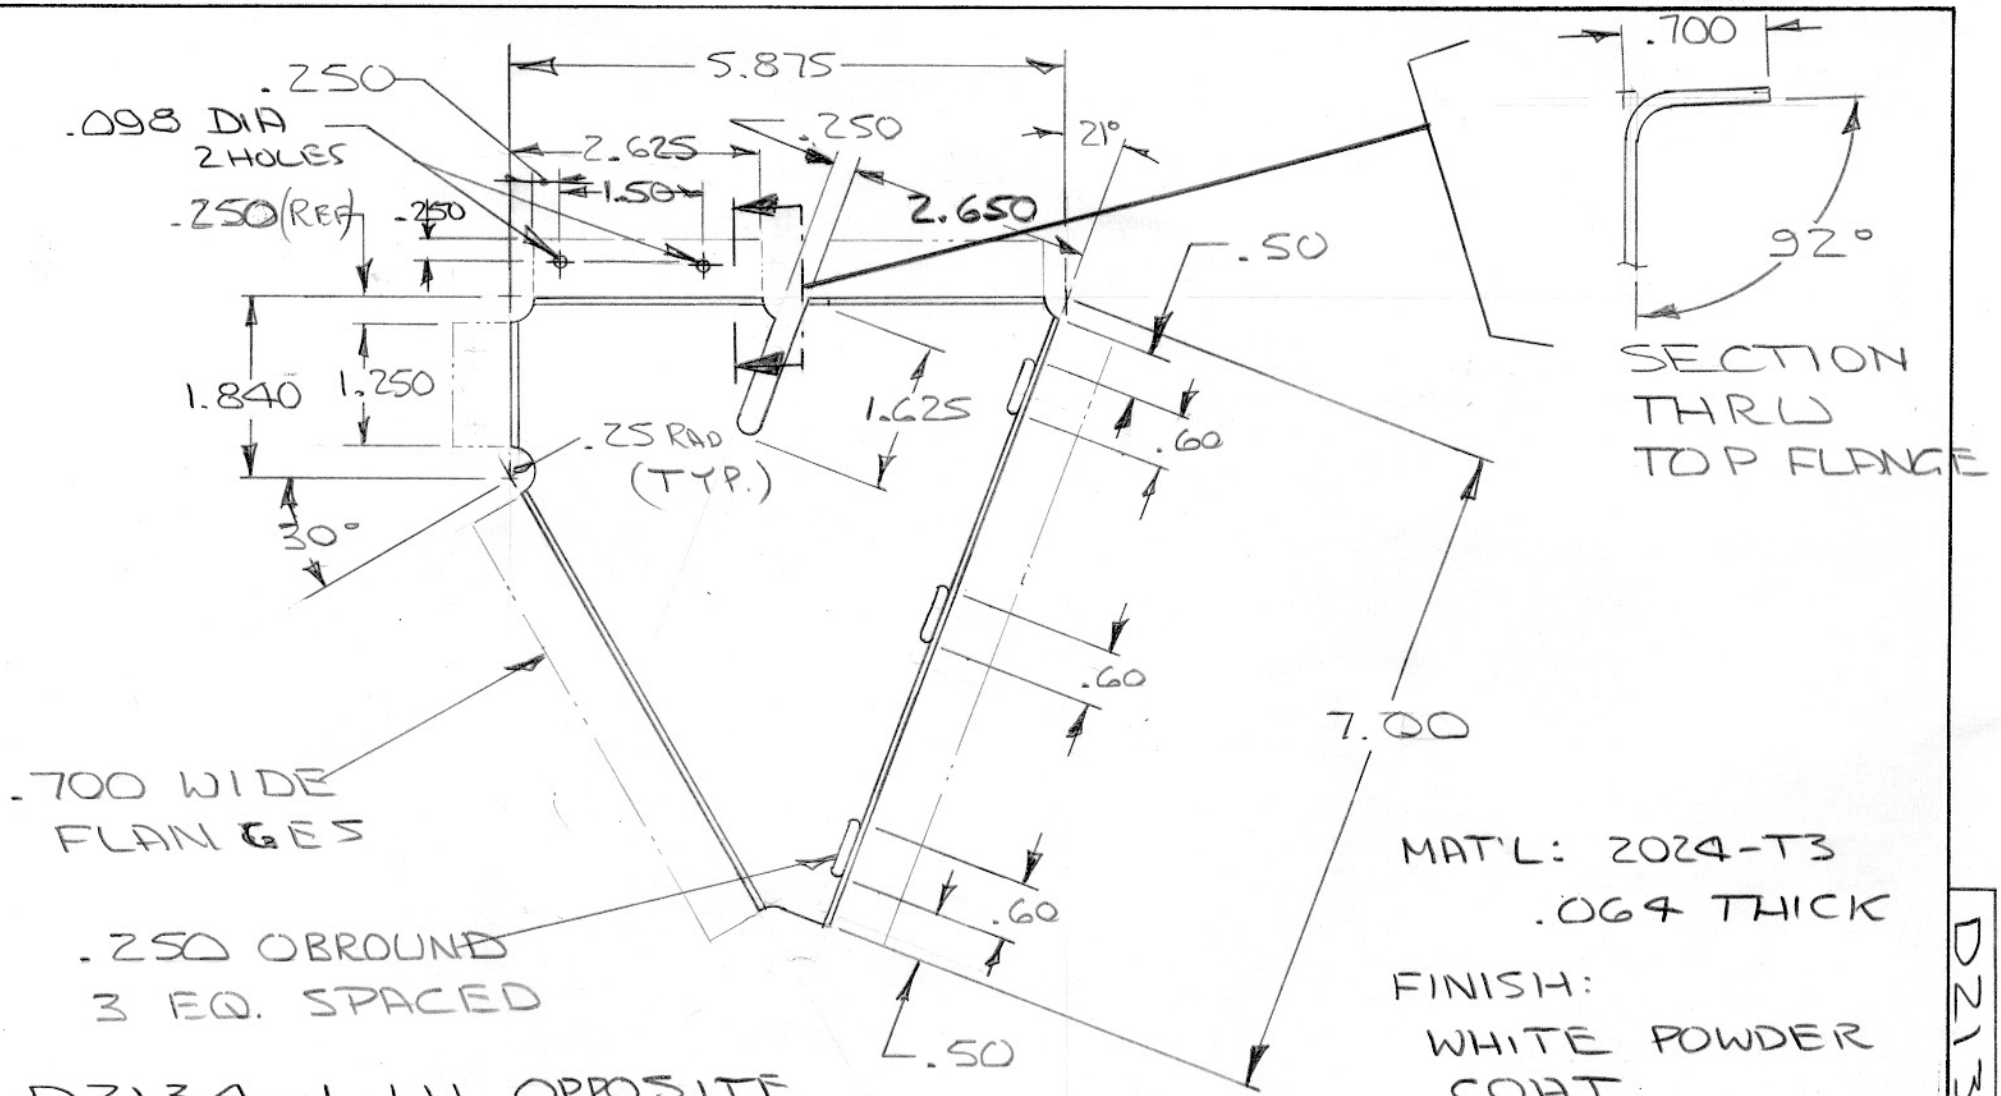

D2134-1 LH OPPOSITE

D2134-2 RH SHOWN

MAT'L: 2024-T3
.064 THICK

FINISH:
WHITE POWDER
COAT.

BEND RADIUS:
.188 RAD.

D2134

REVISION	DESCRIPTION OF CHANGE
DRAWN	
APPROVED	

THIS DRAWING IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT THE PERMISSION OF DART AERO.

REQUIREMENTS — UNLESS OTHERWISE SPECIFIED

GENERAL	LIMITS
1. DIMENSIONS ARE IN INCHES	1 TOLERANCES — .XX ± .030
2. SURFACE ROUGHNESS 125√	.XXX ± .010
3. REMOVE SHARP EDGES .015 MAX	± ½°
4. THREADS PER MIL - S - 7742	2 ANGLES ± .0025
5. HOLES PER AND 10387	3 PARALLELISM .005 MAX
	4 ECCENTRICITY
	5 SYMMETRY ABOUT ALL M/C CENTRE LINES .005

REPORT ALL DISCREPANCIES — DO NOT SCALE

RIVET CODE SHALL BE PER NAS 523

BASIC CODE	DIA. DASH NO. H=HEAD NEAR SIDE F=HEAD FAR SIDE
D=DIMPLE DIGIT=NO OF SHEETS C=COUNTERSINK	LENGTH DASH NO. W=SPOTWELD

BASIC CODES

BJ=MS20470AD
BB=MS20426AD

PART NO.	ITEM	DESCRIPTION	MATERIAL	SPEC./VENDOR
CONTRACT NO.				
DRAWN		DATE JUNE 19 1992		
DESIGN				
STRESS				
CHECKED				
CLIENT				

DART AERO ACCESSORIES INC.
VANCOUVER CANADA

QA COPY ISSUED

TITLE: BRACKET

CODE | DWG NO. D2134 | REV.

SCALE 1 : 2 | SHT | OF 1

D2134